

1- Product Category: LED Strips

2- Product Code: PVLS-2835060TiiLL

3- Product Picture:



4- Product Specification:

LED Q'ty/M	Color temperature		CRI (Ra)	Voltage (VDC)	Current (A/m)	Rate Power (W/m)	Rate Lumen lm/m	FPC Width
60	White	5700-6500K	70	24	0.18	4.3	450	8mm
	Natural white	3800-4250K					450	
	Warm Wite	2800-3100K					430	
60	White	5700-6500K	80	24	0.18	4.3	440	8mm
	Natural white	3800-4250K					440	
	Warm Wite	2800-3100K					420	
60	Red	620-630nm	/	24	0.18	4.3	50	8mm
	Green	515-525nm					200	
	Blue	464-475nm					145	


5- Product Features:

- ◆ 60leds per meter, 5meters per roll, **Rate power** 4.3W/meter (Max. power 4.8W/meter), Viewing angle 120 degrees. Can be customized according to needed.
- ◆ Flexible, cuttable, back with 3M double-sided adhesive, can be installed in the concave convex surface, easy to install.
- ◆ Led strip supports external light regulator type: 0/1-10V PWM Dali Dimmable inductive switch controller.
- ◆ Cutting unit is **100mm**, **6** led chips can be used as a unit, cutting does not affect other parts. Normal length is 5 meters, other lengths also acceptable.
- ◆ Low power consumption, low fever, no glare, impact resistance, energy saving and environmental conservation.
- ◆ LED can be customized to glue dust (IP65), (IP66), silicone casing plus glue waterproof (IP68);


6- Product linking Operation:




7- Product Drawing:

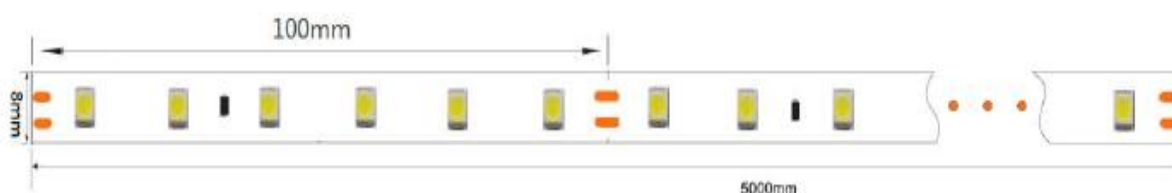


8- Product Installation:

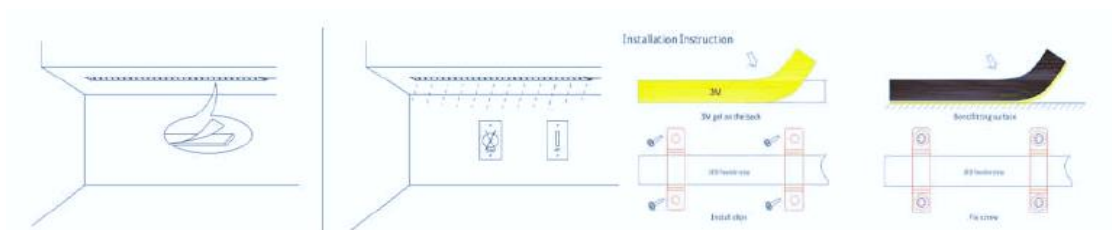

9- Product Electrical Construction:

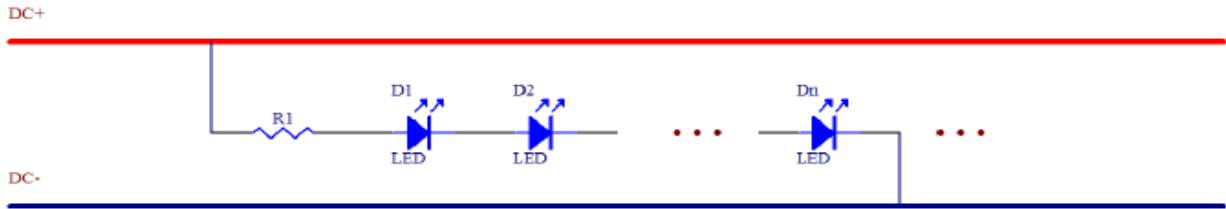

10- Product Packing:

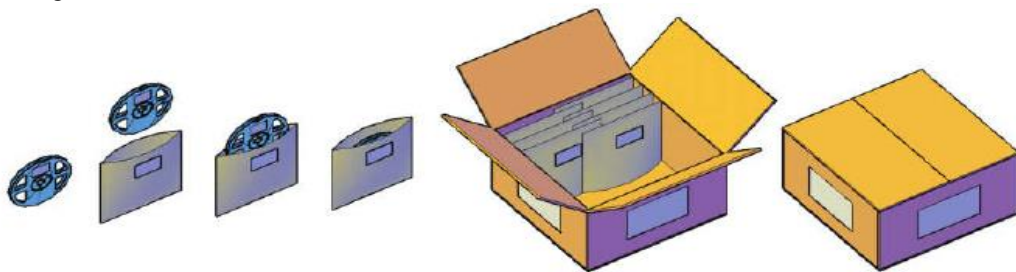

How to customize your LED Strip Order

Description	LED Chip IEC Technology	Qty. Of LED/M	Temperature (kK)	IP	Length (M)
PVLS	XXXX	YYY	T	ii	LL

For Example :

PVLS	2835	060	3	20	05
------	------	-----	---	----	----

PVLS-283506032005

Led Strip 60 Led/M Warm Whight indoor 5 meters